



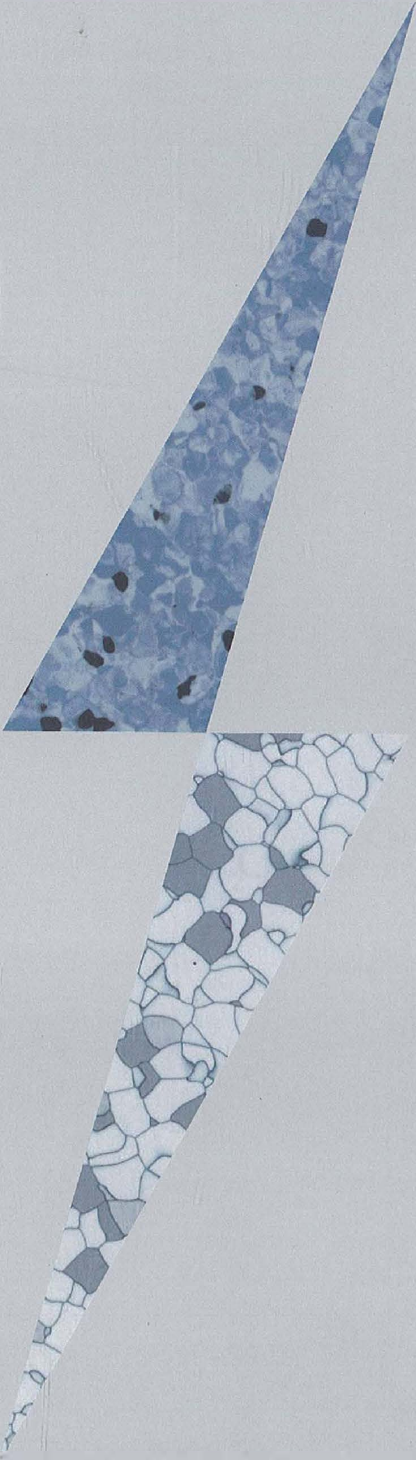


InterWorld®
Your Global Resource


PVC ANTI-STATIC SHEET MATERIAL
PVC 防静电片材

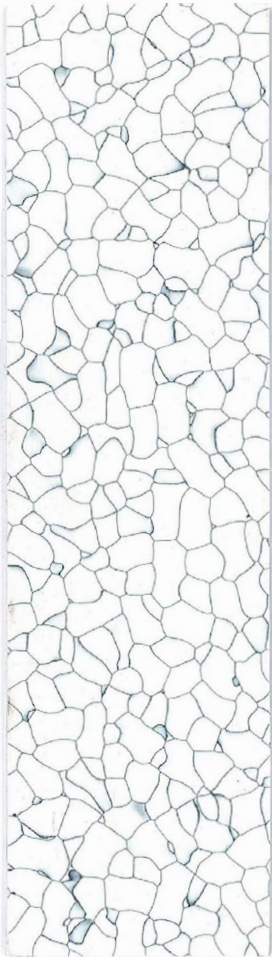


NB-6610

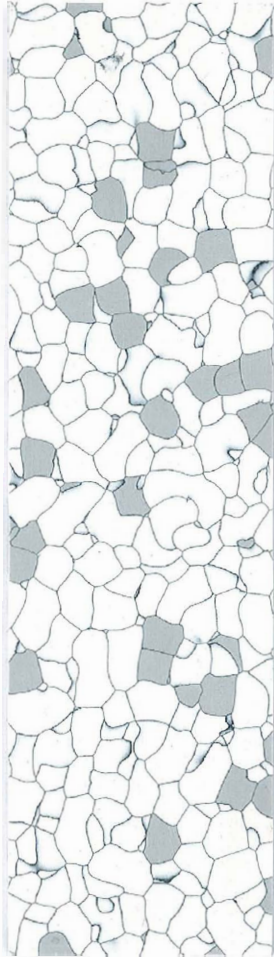


NB-6611

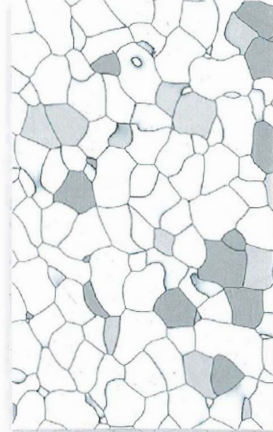

NB-6612

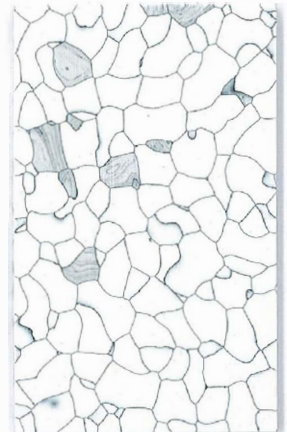

NB-6613

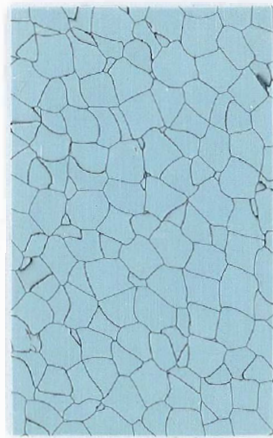


NB-6608




NB-6609




NB-6617

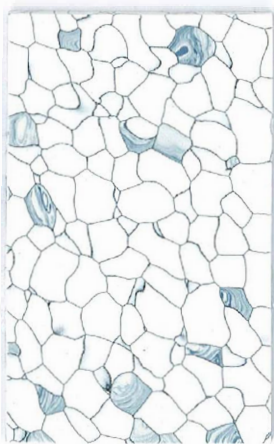


NB-6615

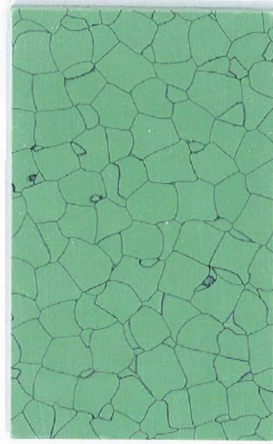

NB-6607

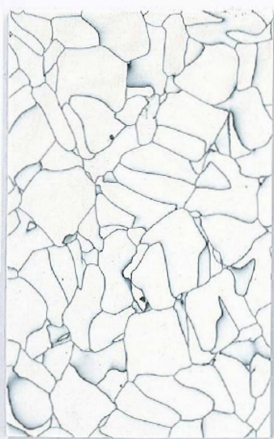


NB-6601

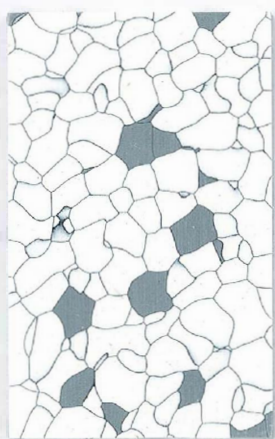


NB-6614




NB-6616

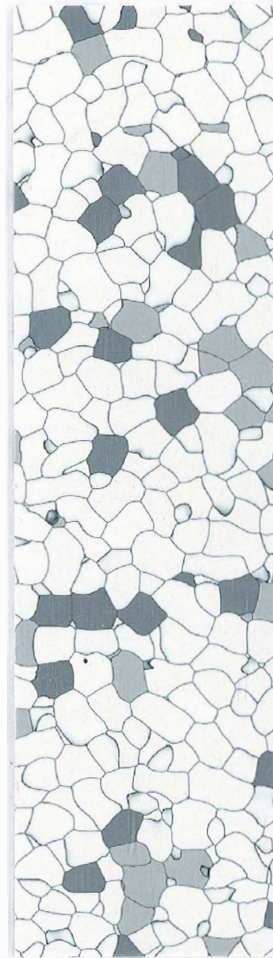

NB-6618

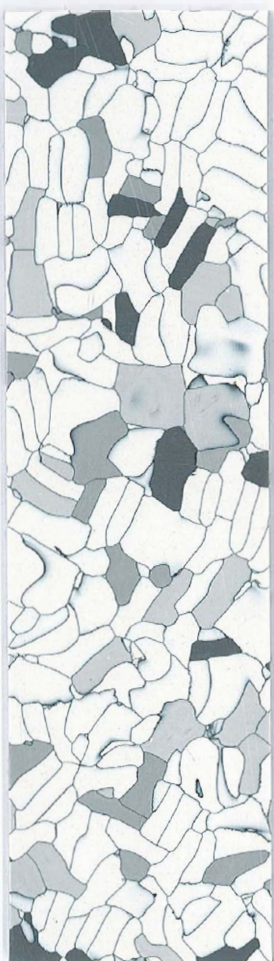


NB-6602

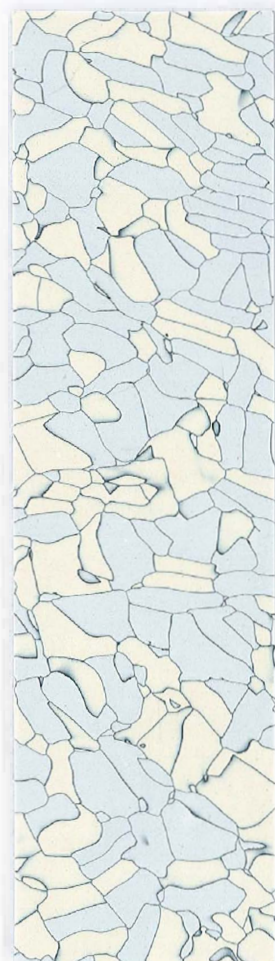

NB-6603



NB-6604

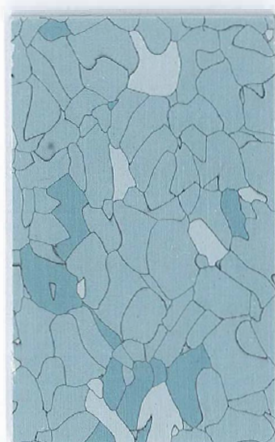

NB-6605



NB-6606



NB-516




NB-786



NB-116



NB-286

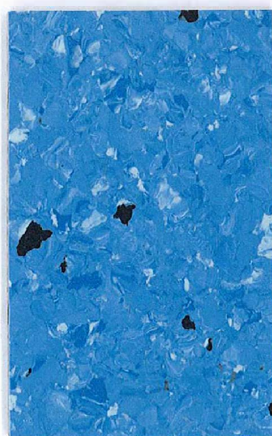


NB-206



NB-736



NB-166

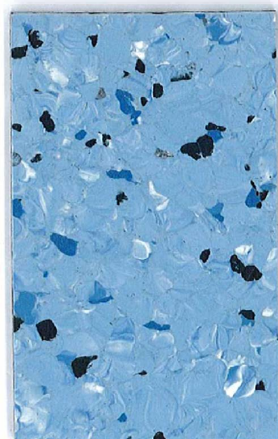

NB-376



NB-656



NB-820



NB-813



NB-814



NB-815



NB-811



NB-816




NB-821



NB-818




NB-819

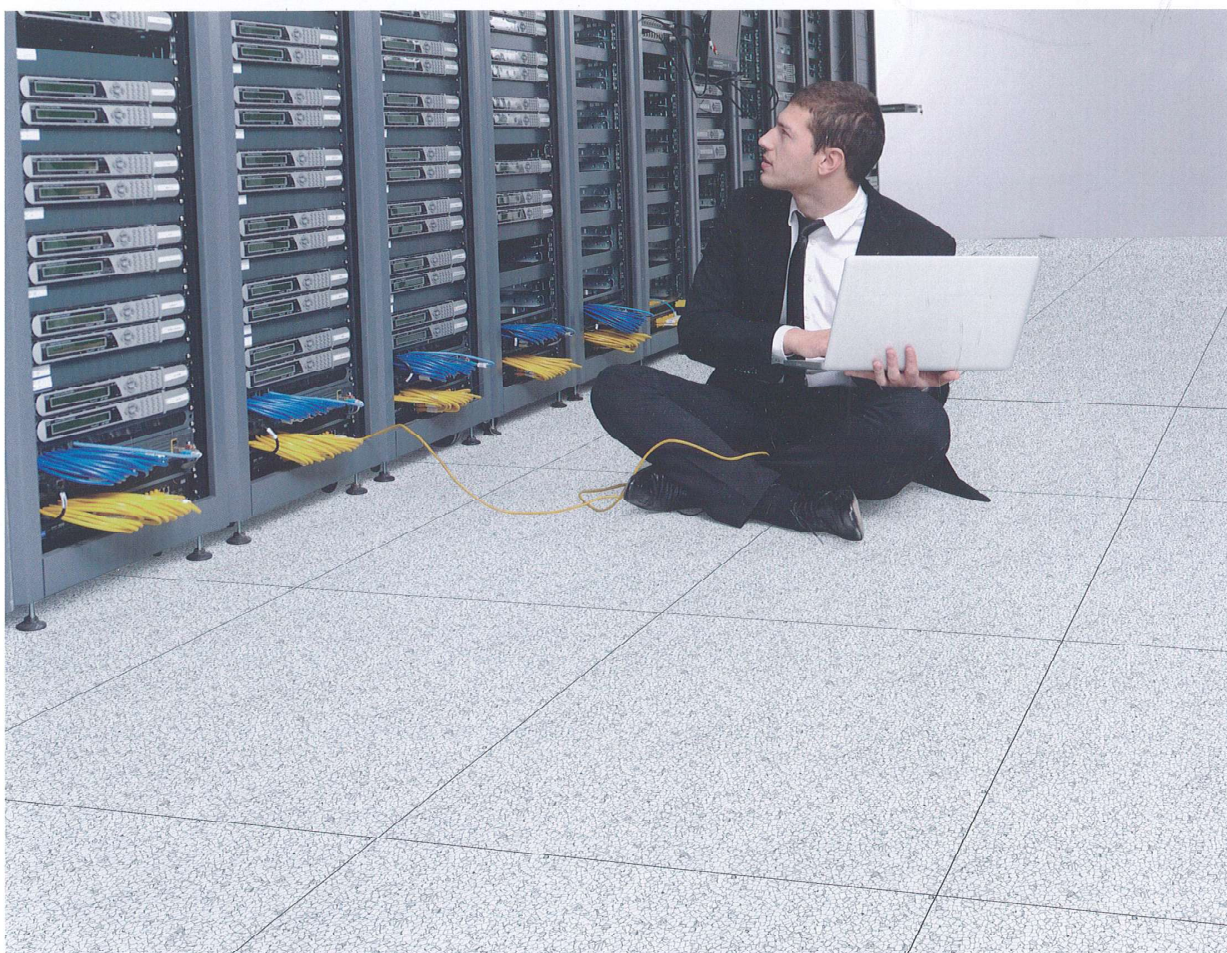


PVC 防静电卷材

PVC ANTI-STATIC ROLL MATERIAL

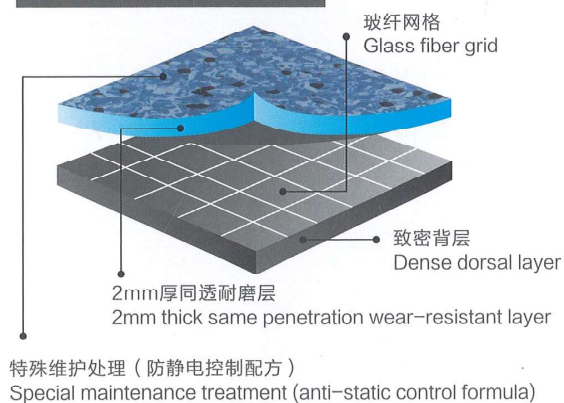

PVC 防静电片材

PVC ANTI-STATIC SHEET MATERIAL

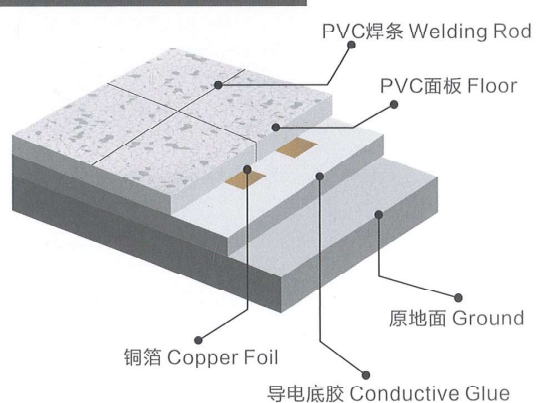

本产品由聚氯乙烯树脂、增塑剂、稳定剂、偶联剂及导电材料等物质组成，利用塑料粒子界面间形成的导静电网络，具有永久性防静电功能。适用于电子、微电子、电信环境、网络地板、洁净室、计算机房等有精密仪器和设备动作的场所。

This product is composed of substances such as polyvinyl chloride resin, plasticizer, stabilizer, coupling agent, and conductive material. It utilizes the electrostatic network formed between plastic particle interfaces and has permanent anti-static function. Suitable for electronic, microelectronic, telecommunications environments, network flooring, clean rooms, computer rooms, and other places with precise instruments and equipment movements.

技术参数 Technical parameter

检测项目 Test Items	标准 Standard	卷材数值 Volume Result
系统电阻 System resistance	DIN 51953 SJ/T11236-2001	导电型 Conductive $1.0 \times 10^4 \sim < 1.0 \times 10^6 \Omega$ 耗散型 Dissipative $1.0 \times 10^6 \sim 1.0 \times 10^9 \Omega$
静电电压衰减期 Decay period of static voltage	SJ/T10694-2006	$\leq 0.4s$
摩擦起电电压 Staring voltage	SJ/T10694-2006 (VI < 100V)	<70V
燃烧性能 Combustion property	GB/T11785-2005 GB/T8626-2007	B1
防滑测试 Slip resistance	DIN 51130 EN13893	R9 ≥ 0.3
有害物质限量测试 Toxic testing	GB18586-2001	合格 Suitable
甲醛释放量 Formaldehyde emission	EN717-1	未检出 N, D
残余压痕 Residual indentation	EN433	$\leq 0.10mm$
耐脚轮磨损 Effect of castor chair	EN425	No delamination no cracks
尺寸稳定性 Dimensional stability	EN434	$\leq 0.40\%$
色牢度 Color fastness	EN ISO 105-B02	≥ 6 级
冲击音吸收 Impact sound absorption vli	EN ISO 0717/2	Apprpx 2dB
耐化学性 Resistance to staining	EN423:2001	指数: 0 · Not affected

安装 INSTALLATION

导静电地板或静电耗散型地砖应该被安装在水平的、光滑的、无裂缝的基础地面上。残余湿度应该根据CM DUMB测试在2.5%以下，地砖、胶水及安装区应达到安装前24小时内至少18度的温度，用质量好的10欧姆以下的导电胶水来粘地板。并于进一步的安装细节问题，欢迎联系我们。

Conductive tile and Static-Dissipative tile should be installed on sub floors that are leveled, smooth and free of cracks. Residual humidity should be under 2.5% tested with the CM dumb test. Tiles, adhesive and installation site should reach a temperature of at least 18°C at least 24 hours before installation, and paste the tiles with qualified conductive glue below 10 Ohm for further details on installation methods, please ask us.

样本仅供作为选色使用
封样请以实际人样为准

技术参数 Technical parameter

项目 Item	片材数值 Volume Result
电阻值 Electric properties DIN51953、ASTMF-1550or NFPA99	导电型片材 Conductive Tile $10^4 \sim 10^6 \Omega$ 耗散型片材 Dissipative Tile $10^8 \sim 10^9 \Omega$
静电电压衰减期 Decay time SJ/T10694-2006 (IVI < 100V)	平均 0.4S Equal 0.4S
摩擦电压 Charge voltage SJ/T10694-2006 (IVI < 100V)	平均 70V Equal 70V
阻燃等级 Fire resistance grade DIN4102	B1
燃烧性能 Combustion properties SJ/T11236-2001 (< 10S, 达到 FV-0 级)	平均 0.35s IFV-0 Equal 0.35s IFV-0
耐磨量 Amount of anti-wear SJ/T11236-2001 ($\leq 0.020\text{g/cm}^2, 100\text{r}$)	平均 0.014 Equal 0.014
耐磨性 Anti-wear properties EN660pt ₂	T组别 Item-T < 2.0mm ³
脚轮碾压 Wheel pressure EN425	不受影响 NO influence
残余凹陷度 Residual concavity EN433/DIN51955	0.03mm(2.0mm) 0.035mm(2.5mm) 0.04mm(3.0mm)
尺寸稳定性 Dimensional stability EN434	$\leq 0.10\%$
色固度 Color fastness ISO 105-B02	At least 6
耐化学性 Resistance to chemicals DIN423、DIN51958	Offers excellent resistance ask for special sheet
冲击音吸收 Impact sound absorption VLI、ISO104、ISO717	Appro $\times 2\text{dB}$
健康护理设施标准 Standard for health care facilities NFPA 99	Confirms to the requirement of NFPA99 in effect at the time of installation
热导 Thermal conductivity DIN51612	0.309W/m.K
除气 ASTM E 595	优异
净化轻易度 DIN 25415-1/ISO 8690	优异
防水性 ASTM D570, 塑料吸水	< 0.15%
耐滑性 EN 13893/ASTM D 2047	$0.60 < \mu < 0.80 / \mu = 0.62$
可修复	是
可回收	是

产品简介 Introduction of construction

由聚氯乙烯树脂、增塑剂、稳定剂、偶联剂及导电材料等物质组成, 利用塑料粒子界面间形成的导电网络, 具有永久性防静电功能。

This product has permanent anti-static function because it uses conductive static network formed at the inter face of plastic particles.

应用范围 Applications

产品适用于电子、微电子、电信环境、网络地板、洁净室、计算机房等有精密仪器和设备动作的场所。

Widely applied to Electronics, microelectronics, telecommunications, network floor, clean room, computer room, computer room and other precision instrument and, room for equipment operation.

质量控制及保证 Warranty

- 产品出厂前已进行导电性能测试, 符合质量标准。
- 销售代表可现场指导或提供施工技术支持。
- 在购买一年内, 产品绝无材料及工艺的缺陷, 如遵照施工规范进行安装和维护, 可保证其10年的保质期(人为造成和自己施工除外)。

以上保证明确取代任何其它的保证, 包括但不限于任何暗含的商务可行性或特殊用途的保证。

- The produces conductive properties have been tested before out of the factory, in compliance with quality standards.
- The sales representatives can also provide technical guidance or support in the job site
- Within 1 year from purchase, no product defects in the materials and technology, Compliance with regulations for the installation and maintenance, there is 10 years guarantee (except for human reasons and install by buyers themselves)

Above guarantee replace any other assurances, including, but not limited to, any guarantee implied in the business feasibility or special purposes.

产品维护 Maintenance

- 由于地板具有不渗透性, 便于清洁表面污垢。
- 使用时切忌锋利的硬物划伤地板, 保持表面光滑。
- 清洗地板时用中性清洁剂擦洗, 用清水冲洗后晾干, 再上防静电蜡。
- 严重脏或带黑点可以用地面清洁机器来清洁。
- Because floor is impermeable, the surface dirty is easy to clean
- Avoid sharp scratches on the floor by hard object, and maintain a surface
- Clearing the floor by neutral detergent, dry after washing, then coated with antistatic wax
- Serious dirty or spots can be used to clean the floor cleaning machine

样本仅供作为选色使用
封样请以实际大样为准